

**RESOLUTION NO. 7-07**  
**CITY OF CENTERVILLE, OHIO**

SPONSORED BY COUNCILMEMBER Paul Gresham ON THE 19<sup>th</sup> DAY  
OF February, 2007.

A RESOLUTION ACCEPTING THE BID SUBMITTED BY  
BARRETT PAVING MATERIALS, INC. FOR WILMINGTON  
PIKE IMPROVEMENTS PHASE I (PROJECT# SS-19) TO  
ADD A TURN LANE AND INSTALL A TRAFFIC SIGNAL AT  
MIAMI VALLEY DRIVE AND TO AUTHORIZE THE CITY  
MANAGER TO ENTER INTO A CONTRACT IN  
CONNECTION THEREWITH.

WHEREAS, the City of Centerville advertised for bidders to prepare infrastructure  
improvements on Wilmington Pike for access to Miami Valley South Health Center,  
according to specifications prepared by the City, and

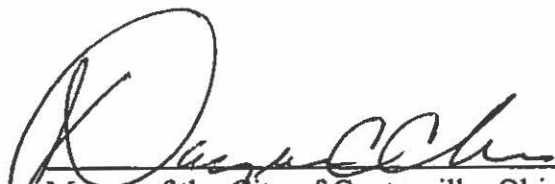
WHEREAS, Barrett Paving Materials, Inc. was the low and best bidder.

NOW, THEREFORE, THE MUNICIPALITY OF CENTERVILLE HEREBY  
RESOLVES:


Section 1. That the bid submitted by Barrett Paving Materials, Inc. of Dayton, Ohio  
for Wilmington Pike Improvements Phase I, # SS-19, and marked as Exhibit "A", attached  
hereto and made a part hereof, be and is hereby accepted in the amount of \$700,045.90 and  
the City Manager is hereby authorized and directed to enter into any necessary contract to  
evidence acceptance of said bid and to make payment pursuant thereto.

Section 2. That the City Manager be and is hereby authorized to expend up to a total  
amount of \$735,045.90 in accordance with unit prices quoted in the bid submitted by  
Barrett Paving Materials, Inc. in order to allow for contingencies during the construction  
project.

PASSED this 19<sup>th</sup> day of February, 2007.


  
Deputy Mayor of the City of Centerville, Ohio

ATTEST:

  
Clerk of Council, City of Centerville, Ohio

CERTIFICATE

The undersigned, Clerk of the Council of the City of Centerville, Ohio hereby certifies that the foregoing is a true and correct copy of Resolution Number 7-07 passed by the Council of the City of Centerville, Ohio on the 19<sup>th</sup> day of February, 2007.

  
Clerk of Council

Approved as to form, consistency  
with existing Ordinances, the  
Charter and Constitutional Provisions.

Department of Law  
Scott A. Liberman  
Municipal Attorney

UNIT PRICE SHEET						
PROJECT NUMBER: <u>SS-19-07</u>						
PROJECT NAME: <u>Wilmington Pike Improvements-Phase I</u>						
THE CITY OF CENTERVILLE MATERIAL AND CONSTRUCTION SPECIFICATIONS ARE PART OF THIS PROPOSAL AND MAY BE REFERENCED FOR A MORE COMPLETE DESCRIPTION OF THE ITEMS LISTED. RETURN ONE (1) FILLED-IN COPY OF PROPERLY SIGNED PROPOSAL TOGETHER WITH THE EXECUTED FORMS.						
REF. NO.	SPEC. NO.	DESCRIPTION	EST'D QUANT.	UNITS	UNIT PRICE	AMOUNT BID
1	201	Clearing and Grubbing	1	LS	<sup>20</sup> 20,500.00	<sup>20</sup> 20,500.00
2A	202	Sidewalk Removed	8975	SF	0.50	4,487.50
2B	202	Conduit Removed, < 24'	50	FT	35.00	1,750.00
2C	202	Conduit Removed, ≥ 24'	275	FT	12.00	3,300.00
2D	202	Catch Basin Removed	6	EACH	230.00	1,380.00
2E	202	Manhole Removed	1	EACH	340.00	340.00
2F	202	Curb Removed	2085	FT	1.25	2,606.25
2G	202	Driveway Apron Removed (Concrete)	750	SF	1.20	900.00
2H	202	Driveway Apron Removed (Asphalt)	1170	SF	0.50	585.00
2H	202	Traffic Box Removed	1	EACH	200.00	200.00
2I	202	Water Meter Pit Removed, As Per Plan	1	LUMP	2,000.00	2,000.00
3A	203	Excavation Not Including Embankment Construction	3352	CY	13.50	45,252.00
3B	203	Embankment	164	CY	1.00	164.00
4A	204	Proof Rolling-Includes Compaction Testing	8	HOURS	62.00	496.00
4B	204	Subgrade Compaction	3659	SY	1.00	3,659.00
5A	206	Lime Stabilized Subgrade	50	SY	3.50	175.00
5B	206	Lime	1	Ton	350.00	350.00
6A	207	Temporary Perimeter Filter Fabric Fence	1636	FT	1.50	2,454.00
6B	207	Temporary Seeding And Mulching	180	SY	0.26	46.80
7	254	Pavement Planing	6420	SY	2.00	12,840.00
8	255	Full Depth Pavement Sawing	1720	FT	1.75	3,010.00
9	301	Bituminous Aggregate Base	1393	CY	81.00	112,833.00
10	304	Aggregate Base	20	CY	95.00	1,900.00
11A	407	Tack Coat For Intermediate Course	65	GAL	1.00	65.00
11B	407	Tack Coat	692	GAL	1.00	692.00
12	410	Traffic Compacted Surface, Type C	40	CY	46.50	1,860.00
13A	448	Asphalt Concrete Surface Course	462	CY	96.00	44,352.00

REF. NO.	SPEC. NO.	DESCRIPTION	EST'D QUANT.	UNITS	UNIT PRICE	AMOUNT BID
13B	448	Asphalt Concrete Intermediate Course	175	CY	95.00	16,625.00
14	452	Driveway Apron (Concrete)	420	SF	4.00	1,680.00
15	601	Rock Channel Protection Type C, with Filter	2.22	CY	95.00	210.90
16A	603	4" Conduit, Type B	100	FT	10.00	1,000.00
16B	603	6" Conduit, Type C	100	FT	10.00	1,000.00
16C	603	4" Conduit, Type E	100	FT	8.00	800.00
16D	603	4" Conduit, Type F	90	FT	5.00	450.00
16E	603	6" Conduit, Type F	100	FT	8.00	800.00
16F	603	12" Conduit, Type B 706.02	65	FT	65.00	4,225.00
16G	603	19" x 30" Conduit, Type B 706.02	337	FT	85.00	28,645.00
17A	604	Catch Basin #3A	5	EACH	1,600.00	8,000.00
17B	604	Manhole Adjusted To Grade	6	EACH	300.00	1,800.00
17C	604	Manhole No. 3	2	EACH	1,675.00	3,350.00
18	605	6" Underdrains	1800	FT	6.50	11,700.00
19	607	Fence Remove and Resc:	325	LF	18.00	5,850.00
20A	608	Curb Ramp (See Plans for Type)	8	EACH	300.00	2,400.00
20B	608	4" Concrete Sidewalk	8980	SF	2.45	22,001.00
21	609	Curb, Type 6	1800	FT	8.35	15,030.00
22A	614	Maintaining Traffic	1	LUMP	48,000.00	48,000.00
22B	614	Law Enforcement Officer with A Patrol Car	8	HOURS	50.00	400.00
22C	614	Maintaining Traffic Miscellaneous: Business Sign	2	EACH	250.00	500.00
23	616	Water	15	M Gal	3.00	45.00
24	623	Construction Layout Staking	1	LUMP	5,000.00	5,000.00
25	624	Mobilization	1	LUMP	7,000.00	7,000.00
26A	625	Luminaire Conventional	5	EACH	211.00	1,055.00
26B	625	Conduit, 2", 725.04	748	FT	5.84	4,368.32
26C	625	Conduit, 3", 725.04	32	FT	15.61	499.52
26D	625	Trench	764	FT	5.00	3,820.00
26E	625	Pull Box, 725.08, 18"	8	EACH	560.00	4,480.00
26F	625	Pull Box, 725.08, 18"	1	EACH	670.00	670.00
26G	625	Ground Rod, As Per Plans	6	EACH	151.00	906.00
27A	630	Sign Hanger Assembly, Span Wire	11	EACH	211.00	2,321.00

REF. NO.	SPEC. NO.	DESCRIPTION	EST'D QUANT.	UNITS	UNIT PRICE	AMOUNT BID
27B	630	Sign Flat Sheet Type G	121	SF	20.00	2,420.00
28A	632	Vehicular Signal Head, 3 Section, 12" Lens, 1 Way, As Per Plan	10	EACH	660.00	6,600.00
28B	632	Vehicular Signal Head, 5 Section, 12" Lens, 1 Way, As Per Plan	3	EACH	1,044.00	3,132.00
28C	632	Pedestrian Pushbutton	5	EACH	125.00	625.00
28D	632	Detector Loop	15	EACH	760.00	11,400.00
28E	632	Loop Detector Unit, 2 Channel, As Per Plan	11	EACH	248.00	2,728.00
28F	632	Signal Cable, 2 Conductor, No. 14 AWG	885	FT	1.15	1,017.75
28G	632	Signal Cable, 5 Conductor, No. 14 AWG	885	FT	1.40	1,239.00
28H	632	Signal Cable, 7 Conductor, No. 14 AWG	690	FT	1.70	1,173.00
28I	632	Signal Installation Removed, As Per Plan	1	LUMP	2,368.00	2,368.00
28J	632	Messenger Wire, 7 Strand, 3/8" Diameter	331	FT	6.00	1,986.00
28K	632	Pedestrian Signal Heads with LED Lamp Units	5	EACH	464.00	2,320.00
28L	632	Signal Support Foundation	5	EACH	1,650.00	8,250.00
28M	632	Loop Detector Lead In Cable, 2 Conductor	4442	FT	0.90	3,997.80
28N	632	Power Service, As Per Plan	1	EACH	1,150.00	1,150.00
28O	632	Combination Strain Pole, TC-81.10, Design 12	4	EACH	6,920.00	27,680.00
28P	632	Combination Strain Pole, TC-81.10, Design 7	1	EACH	4,920.00	4,920.00
28Q	632	Power Cable 2 Conductor, No 8 AWG	65	FT	2.63	170.95
28R	632	Service Cable 3 Conductor, No 8 AWG	150	FT	2.75	412.50
29A	633	Controller Unit, Type Econofit : ASC/2 with Cabinet Type TS1, As Per Plan	1	EACH	8,200.00	8,200.00
29B	633	Controller Work Pad	1	EACH	436.00	436.00
30A	638	12" Water Main Ductile Iron Pipe Class 52 Push On Joints and Fittings	240	FT	96.00	23,040.00
30B	638	12" Water Main Ductile Iron Pipe Class 52 Directional Bore	125	FT	250.00	31,250.00
30C	638	12" Tapping Sleeve and Valve Box	2	EACH	6,200.00	12,400.00
30D	638	6" Water Main Ductile Iron Pipe ANSI Class 52, Mechanical Joints and Fittings	15	FT	75.00	1,125.00
30A	638	6" Gate Valve and Valve Box	2	EACH	2,600.00	5,200.00
30B	638	6" Fire Hydrant	3	EACH	2,050.00	6,150.00
30C	638	Fire Hydrant Removed	3	EACH	300.00	900.00
30D	638	Water Meter Pit, As Per Plan	1	LUMP	44,000.00	44,000.00
30E	638	Water Main Abandoned (Cut, Cap & Plug Per Owner Regulations (Each Location)	2	EACH	900.00	1,800.00
31A	642	Traffic Signal Interconnect As Per Plan	1	LUMP	1,470.00	1,470.00
31B	642	Crosswalk Line	803	FT	1.65	1,324.95

REF. NO.	SPEC. NO.	DESCRIPTION	EST'D QUANT.	UNITS	UNIT PRICE	AMOUNT BID
31C	642	Stop Line	250	FT	2.05	512.50
31D	642	Channelizing Line	1240	FT	0.37	458.80
31E	642	Edge Line	1467	FT	0.20	293.40
31F	642	Centerline, Double Solid Yellow	80	FT	1.00	80.00
31G	642	Lane Arrow	18	EACH	39.00	702.00
31H	642	Lane Line	2124	FT	0.16	339.84
31I	642	Word on Pavement	4	EACH	62.00	248.00
31J	642	Dotted Line, 6"	180	FT	0.75	135.00
32A	659	Water	1	M Gal	50.00	50.00
32B	659	Commercial Fertilizer	1	TON	285.00	285.00
32C	659	Seeding And Mulching	1788	SY	0.49	876.12
33A	SPEC	Tensar Geogrid (BIAXIAL - BX-1200)	100	LF	3.50	350.00
33B	SPEC	#2 Stone	50	CY	25.00	1,250.00
33C	SPEC	Undercutting	50	CY	15.00	750.00

**GRAND TOTAL WILMINGTON PIKE IMPROVMENTS PHASE 1**

BW  
700,045.90

**EXECUTION OF PROPOSAL**

NOTE: Failure to sign the proposal shall result in rejection of the bid.

THIS PROPOSAL SUBMITTED BY: **BARRETT PAVING MATERIALS INC.**

NAME OF CONTRACTOR

SIGNATURE: *Rodney B. Russell* *Bill Wohlford*  
 RODNEY B. RUSSELL BILL WOHLFORD

DATE: **FEBRUARY 9, 2007**

Contact person for contract processing: **JOHN K. SINGER**

Mailing address if different from above:

**CONTRACT PREPARATION INFORMATION**

The bidder shall supplement the proposal by supplying the following information for use in the preparation of the Contract.

COMPANY: **BARRETT PAVING MATERIALS INC.**  
 BY: *Rodney B. Russell* *Bill Wohlford*  
 TITLE: **RODNEY B. RUSSELL REGIONAL MANAGER** **BILL WOHLFORD CONSTRUCTION MANAGER**  
 ADDRESS: **2551 NEEDMORE ROAD - DAYTON, OH 45414**  
 PHONE: **(937) 279-3200**  
 FAX: **(937) 279-3205**

NUMBER OF WORKING DAYS TO COMPLETION FROM DATE OF NOTICE TO PROCEED: **80**

FEDERAL TAX ID: **13-3003901**