

RESOLUTION NO. 23-98
CITY OF CENTERVILLE, OHIO

SPONSORED BY COUNCILMEMBER JAMES SINGER ON THE
17th DAY OF AUGUST, 1998.

A RESOLUTION AUTHORIZING THE CITY MANAGER
TO EXECUTE PAYMENT FOR CHANGE ORDERS
NECESSARY FOR THE CONSTRUCTION OF THE
YANKEE TRACE DRIVE EXTENSION, FOR THE CITY
OF CENTERVILLE.

WHEREAS, certain change orders for the construction of the Yankee Trace Drive extension are necessary for the completion of the project; and

WHEREAS, these change orders have been presented to the City of Centerville for payment by the contractor, Pyper Construction Company.


NOW THEREFORE, THE MUNICIPALITY OF CENTERVILLE HEREBY
RESOLVES:

Section 1. That the City Manager is hereby authorized to execute payment for the total amount of \$24,004.75 for the change orders listed in Exhibit "A", attached hereto and incorporated herein, that are necessary for the completion of the Yankee Trace Drive Extension for the City of Centerville.

Section 2. That the City Manager is hereby authorized to execute payment for the total amount of \$173,070.55 for the change orders listed in Exhibit "B", attached hereto and incorporated herein, that are necessary for the completion of the Yankee Trace Drive Extension for the City of Centerville.

Section 3. This Resolution shall become effective at the earliest date allowed by law.

PASSED this 17th day of AUGUST, 1998.



Mayor of the City of Centerville, Ohio

ATTEST:

Maria J. McLaughlin
Clerk of Council, City of Centerville, Ohio

CERTIFICATE

The undersigned, Clerk of the Council of the City of Centerville, Ohio, hereby certifies that the foregoing is a true and correct copy of Resolution Number 23-98, passed by the Council of the City of Centerville, Ohio, on the 17th day of AUGUST, 1998.

Maria J. McLaughlin
Clerk of Council

Approved as to form, consistency
with the Charter and Constitutional Provisions.

Department of Law
Robert N. Farquhar
Municipal Attorney



Sally D. Beals
Mayor

Gregory B. Horn
City Manager

City of Centerville

100 W. Spring Valley Rd.
Centerville, Ohio 45458-3759

August 11, 1998

CHANGE ORDER #1

Contract Yankee Trace Drive North Improvements

Contractor Pyper Construction Company
7980 South Suburban Road
Centerville, OH 45458

Purpose Change Order #1 provides for miscellaneous additions, changes to original contract quantities due to plan changes or field conditions encountered.

ITEM	DESCRIPTION	ADD	DELETE
Spec	Traffic Island "A" (complete)	\$2,965.00	-
Spec	Traffic Island "B" (complete) (Per specifications in bidding instructions)	\$3,995.00	-
603	12 inch Storm Sewer 217 LF @ \$16.20/LF=\$3,515.40	\$3,515.40	-
604	2-2A Catch Basins 3 @ \$600.00/EA=\$1,800	\$1,800.00	-
Spec	8"x4" Wyes (sanitary) 2 @ \$36.55/EA=\$73.10	\$ 73.10	-
Spec	4" Sanitary Laterals 43 LF @ \$16.75/LF=\$720.25	\$ 720.25	-




An Architectural Preservation District City
(937) 433-7151

Change Order #1
Yankee Trace Drive North Extension

Page 2

ITEM	DESCRIPTION	ADD	DELETE
Spec	1" Water Services 125 LF @ \$12.00/LF= \$1,500.00	\$1,500.00	-
Spec	1" Water Taps 2 @ \$125.00/EA= \$250.00	\$ 250.00	-
203	Undercutting 1156 CY @ \$6.00/CY= \$6,936.00	\$6,936.00	-
Spec	Utility Cross-overs 300 LF @ \$7.50/LF= \$2,250.00	\$2,250.00	-
	TOTAL CHANGE ORDER #1	\$24,004.75	



Sally D. Beals
Mayor

Gregory B. Horn
City Manager

City of Centerville

100 W. Spring Valley Rd.
Centerville, Ohio 45458-3759

CHANGE ORDER #2

Contract Yankee Trace Drive North Improvements


Contractor Pyper Construction Company
7980 South Suburban Road
Centerville, OH 45458

Purpose Change Order #2 provides for a changed plan extending the roadway construction approximately 317 lineal feet south, by increasing the plan quantities, adding a 4'x12' box culvert with headwalls, and adding 12" sanitary sewer extension associated with the roadway construction.

YANKEE TRACE

Yankee Trace Drive North Extension (Sta 44+00 to 47+17.25)

<u>Description</u>	<u>Unit</u>	<u>Unit Price</u>	<u>Contract Quantity</u>	<u>Contract Amount</u>
EARTHWORK/EROSION CONTROL				
Clearing/Grubbing	LS	1.00	2,200	2,200.00
Excavation	CY	2.20	2,200	4,840.00
Embankment	CY	1.50	2,200	3,300.00
Stripping (Unit Price)	CY	2.20	700	1,540.00
Undercut	CY	6.00	0	0.00
Subtotal Earthwork Unit Price				\$11,880.00
SOIL EROSION CONTROL				
Seed, Mulch, & Fertilizer	AC	0.00	0	0.00
Silt Fence	LF	1.20	400	480.00
Straw Bales	EA	0.00	0	0.00
Curb Gravel Inlet Sediment Filter	EA	65.00	2	130.00
Subtotal Soil Erosion Control				\$ 610.00

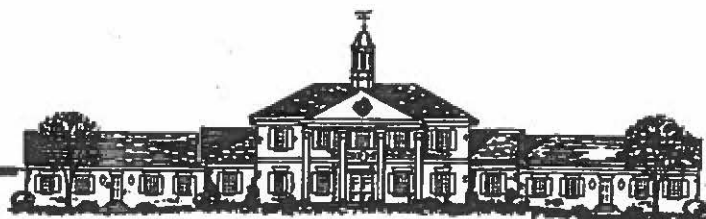

An Architectural Preservation District City
(937) 433-7151

<u>Description</u>	<u>Unit</u>	<u>Unit Price</u>	<u>Contract Quantity</u>	<u>Contract Amount</u>
SANITARY SEWER				
Connect to extension	EA	600.00	1	600.00
12" Sanitary Sewer	LF	26.55	477	12,664.35
12" Sanitary Sewer (C-900 or Poly)	LF	31.55	170	5,363.50
4" Sanitary Laterals	LF	16.75	590	9,882.50
Std. Sanitary MH Complete	EA	1,472.00	3	4,416.00
12"x4" WYE (pvc)	EA	75.00	10	750.00
12"x4" WYE (C-900)	EA	485.00	2	970.00
Total Sanitary Sewer				\$34,646.35
SECTION 3 - STORM SEWER				
12" Storm Sewer	LF	16.20	347	5,621.40
4'x12' Box Culvert	LF	614.80	88	54,102.40
Catch Basin Type 3	EA	1,500.00	2	3,000.00
Catch Basin Type 3A	EA	995.00	2	1,990.00
4'x12' Box Headwall	EA	9,500.00	2	19,000.00
Rock Channel Protection (Type B)	CY	50.00	31	1,550.00
<u>Underdrains</u>	LF	5.00	630	<u>3,150.00</u>
Subtotal Storm Sewer Unit Price				\$88,413.80
WATER MAIN				
8" Water Main (Complete)	LF	25.50	375	9,562.50
Fire Hydrants (New FH Complete)	EA	1,800.00	1	1,800.00
Fire Hydrants (Temp. Reuse Ex. Temp)	EA	1,300.00	1	1,300.00
8" Gate Valve & Box	EA	650.00	3	1,950.00
8"x8" Tee	EA	175.00	1	175.00
<u>Remove Temp FH and Connect</u>	LS	250.00	1	<u>250.00</u>
Subtotal Water Mains				\$15,037.50
PAVEMENT (UNIT PRICE)				
Hiker/Biker Trail	SF	0.77	2,040	1,570.80
304 Aggregate Base	CY	25.00	173	4,325.00
301 Asphalt Base	CY	57.42	70	4,019.40
403 Asphalt Level	CY	71.02	35	2,485.70
24" Roll Curb & Gutter	LF	8.00	625	5,000.00
Electric Crossovers (4-4")	LF	7.50	100	750.00
<u>Wheel Chair Ramp</u>	EA	66.00	2	<u>132.00</u>
Subtotal Pavement Unit Price				\$18,282.90
MISCELLANEOUS				
Construction layout staking	Lump	2,500.00	1	2,500.00
<u>Additional bond Premium</u>	Lump	1,700.00	1	<u>1,700.00</u>
Subtotal Miscellaneous				4,200.00
TOTAL CHANGE ORDER #2				\$173,070.55